

LINT INTERCEPTOR STAINLESS STEEL MANUAL


Lint, Hair Interceptor

Lint interceptors are utilized at hospitals, hotels, military barracks and all other bulk laundries, where drain troughs are not used to remove excess lint and other solid debris, to prevent them entering to the sanitary waste system. Suitable sizes to be selected compared to the instantaneous maximum flow.

Lint interceptors are installed at the last point where the pumped waste water reaches to the sanitary drainage pipe, preferably at the basement floor.



TECHNICAL SPECIFICATIONS

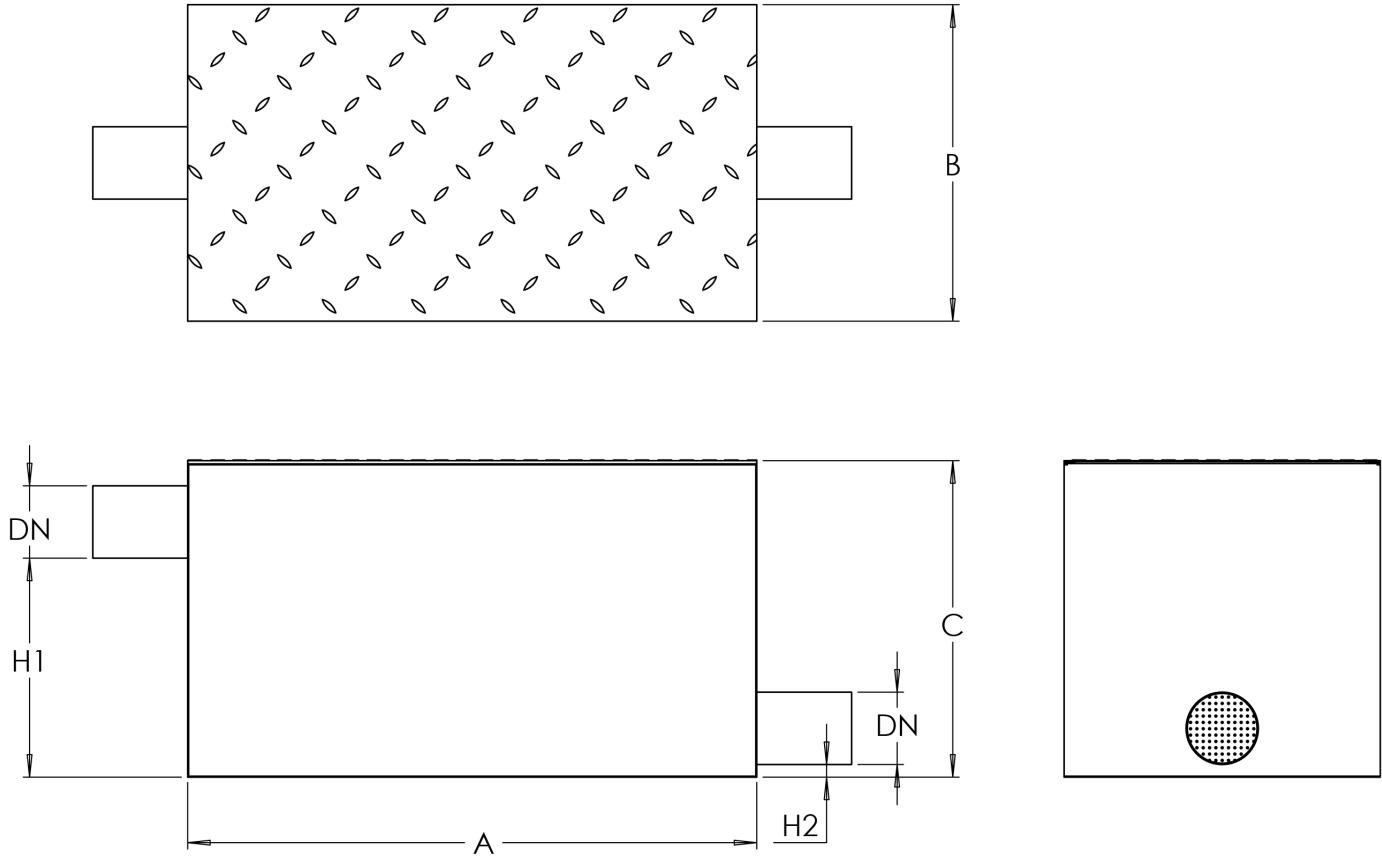

PRODUCT DIMENSIONS

Code		NS (lt/sec)	DN	A	B	C	H1	H2
ss304	ss316							
1721033	2721033	0,33	50	400	400	300	195	20
172105	272105	0,5	70	900	500	300	195	20
17211	27211	1	100	900	500	500	346	20
1721015	2721015	1,5	100	1000	600	600	446	20
17213	27213	3	100	1000	1000	600	446	20
17215	27215	5	100	1250	1250	600	446	20
17217	27217	7	150	1250	1250	900	697	20
172113	272113	13	150	1250	2200	1000	797	20
172115	272115	15	150	1250	2500	1100	895	20
172120	272120	20	150	1500	2500	1250	1045	20

Dimensions are in mm.